


FM D30 L2800 DBS R320 GFK AL STTZN (819 287)

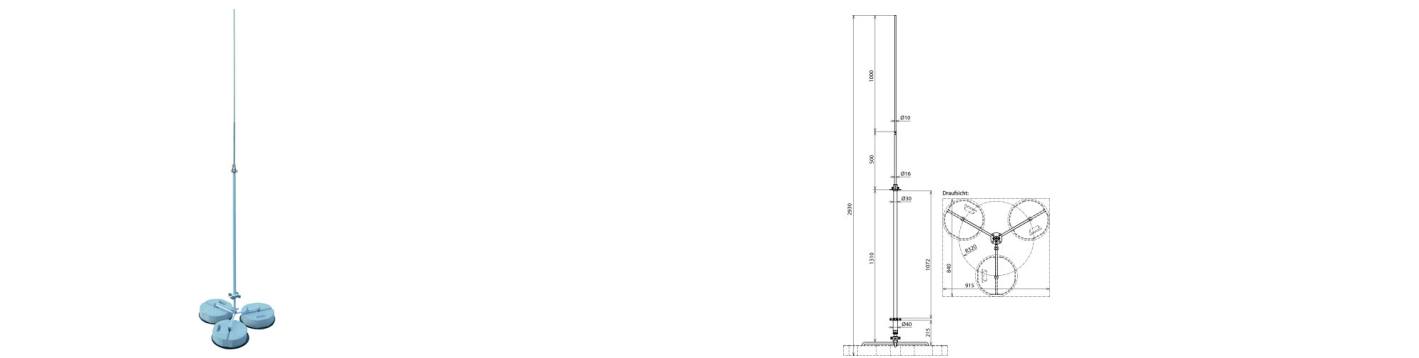

| Type                                                               | FM D30 L2800 DBS R320 GFK AL STTZN               |
|--------------------------------------------------------------------|--------------------------------------------------|
| Part No.                                                           | 819 287                                          |
| Height                                                             | 2800 mm                                          |
| Material of tripod                                                 | St/tZn                                           |
| Space required for tripod                                          | 850 x 930 mm                                     |
| Radius of tripod                                                   | 320 mm                                           |
| Number of bases                                                    | 3                                                |
| Material of supporting tube                                        | GRP / Al                                         |
| Length of supporting tube                                          | 1300 mm                                          |
| Insulating clearance                                               | 1095 mm                                          |
| Diameter Ø outside                                                 | 30 mm                                            |
| Length of air-termination tip                                      | 1500 mm                                          |
| Material of air-termination tip                                    | Al                                               |
| Max. gust wind speed for 3 bases, 17 kg each, 2x HVI light outside | 132 km/h                                         |
| Pull-out force with a length of 500#mm                             | 200 N (supporting tube insulator as per 62561-8) |
| Bending force with a length of 500#mm                              | 200 N (supporting tube insulator as per 62561-8) |
| Standard                                                           | DIN IEC/TS 62561-8 (VDE V 0185-561-8)            |
| Weight                                                             | 4,47 kg                                          |
| Customs tariff number (Comb. Nomenclature EU)                      | 85389099                                         |
| GTIN                                                               | 4013364252097                                    |
| PU                                                                 | 1 pc(s)                                          |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.