


FM D50 22 16 10 4900 GFK AL DBS KB STTZN (819 390)



Figure without obligation

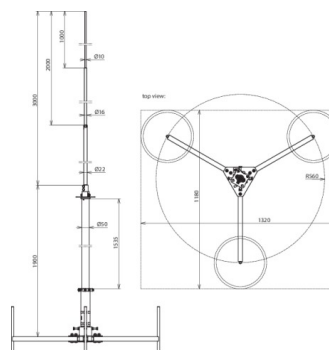

Type	FM D50 22 16 10 4900 GFK AL DBS KB STTZN
Part No.	819 390
Height	4900 mm
Material of tripod	St/tZn
Space required for tripod	1180 x 1320 mm
Radius of tripod	560 mm
Material of supporting tube	GRP / Al
Length of supporting tube	1900 mm
Insulating clearance	1535 mm
Diameter Ø outside	50 mm
Length of air-termination rod	3000 mm
Material of air-termination rod	Al
Type of screw	⚙ M10 x 40
Max. gust wind speed for 3 bases, 17 kg each, 2x HVI light outside	97 km/h
Max. gust wind speed for 6 bases, 17 kg each, 2x HVI light outside	124 km/h
Max. gust wind speed for 9 bases, 17 kg each, 2x HVI light outside	147 km/h
Pull-out force with a length of 500#mm	200 N (supporting tube insulator as per 62561-8)
Bending force with a length of 500#mm	200 N (supporting tube insulator as per 62561-8)
Standard	DIN IEC/TS 62561-8 (VDE V 0185-561-8)
Weight	13,15 kg
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364241930
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.