


DC BK 6 FL30 STBLANK (308 140)



Figure without obligation

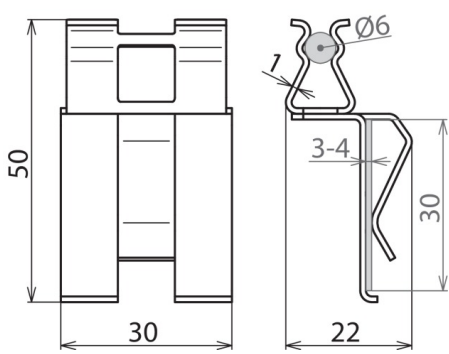

- Compact, light and resource-saving
- Quick and without tools
- Efficient and time-saving

Arrangement: 

| Type                                                      | DC BK 6 FL30 STBLANK                                                                        |
|-----------------------------------------------------------|---------------------------------------------------------------------------------------------|
| Part No.                                                  | 308 140                                                                                     |
| Material                                                  | St/bare                                                                                     |
| Clamping range Rd* / Fl                                   | 6-7 / 30 mm                                                                                 |
| Material thickness (t1)                                   | 1 mm                                                                                        |
| Short-circuit current (a.c. 50 Hz / d.c.) (1 s; ≤ 300 °C) | 2.0 kA                                                                                      |
| Lightning current carrying capability (10/350 µs)         |  50 kA** |
| Standard                                                  | EN 62561-1                                                                                  |
| Weight                                                    | 21 g                                                                                        |
| Customs tariff number (Comb. Nomenclature EU)             | 85359000                                                                                    |
| GTIN                                                      | 4013364288935                                                                               |
| PU                                                        | 50 pc(s)                                                                                    |

<sup>\*)</sup> Nominal diameter d<sub>s</sub> of the reinforcement  
<sup>\*\*)</sup> For exact assignment see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.