


IS 36 SQ 1000 (766 311)

- For use as switching, operating and earthing stick
- Handle closed with end cap

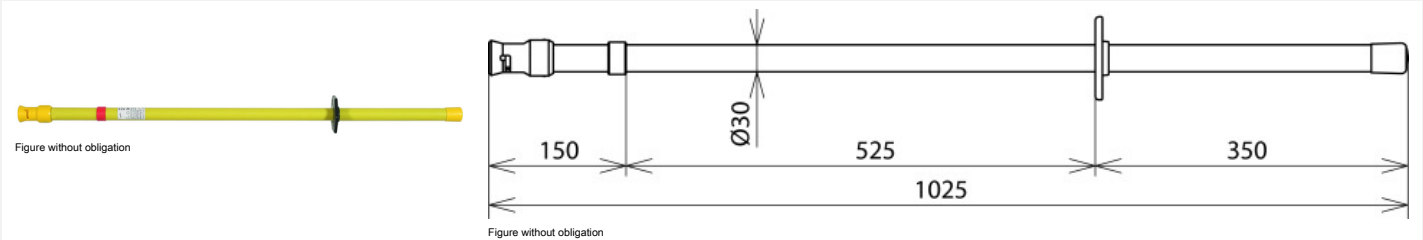

| Type                                                 | IS 36 SQ 1000                         |
|------------------------------------------------------|---------------------------------------|
| Part No.                                             | 766 311                               |
| Nominal voltage (U <sub>N</sub> )                    | 1 ... 36 kV                           |
| Total length (l <sub>Σ</sub> )                       | 1025 mm                               |
| Insulating clearance (l <sub>i</sub> )               | 525 mm                                |
| Handle length (l <sub>H</sub> )                      | 350 mm                                |
| Insertion depth (l <sub>o</sub> )                    | 150 mm                                |
| Standard (insulating stick)                          | DIN VDE V 0681-1                      |
| For                                                  | Indoor and outdoor installations      |
| Material                                             | Glass-fibre reinforced polyester tube |
| Diameter                                             | 30 mm                                 |
| For use at                                           | ☀                                     |
| Supporting head for                                  | T pin shaft                           |
| Anti-rotation plug-in coupling including end fitting | No                                    |
| Type of device                                       | Insulating stick                      |
| Weight                                               | 419 g                                 |
| Customs tariff number (Comb. Nomenclature EU)        | 82055980                              |
| GTIN                                                 | 4013364017856                         |
| PU                                                   | 1 pc(s)                               |

<sup>\*)</sup> Max. shutter weight when inserting insulating protective shutters

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.