

SCS 72 3000 (763 630)

- For use as operating stick for inserting insulating protective shutters
- Handle termination with end cap



Figure without obligation

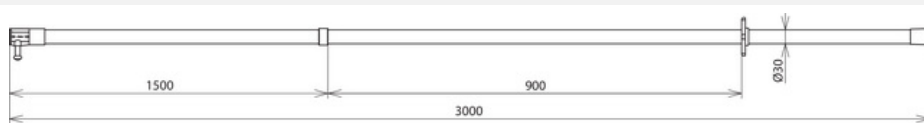


Figure without obligation

Type	SCS 72 3000
Part No.	763 630
Nominal voltage (U _N)	1 ... 72.5 kV
Total length (l _σ)	3000 mm
Insulating clearance (l _i)	900 mm
Length (handle) (l _H)	600 mm
Insertion depth (l _σ)	1500 mm
Standard (switching stick head)	DIN VDE V 0681-2
Standard (switching stick)	DIN VDE V 0681-1 and -2
Standard (insulating stick)	DIN VDE V 0681-1
For use at	*
For	For indoor and outdoor installations
Design	Fully insulated, solid switching stick head
Material (insulating tube)	Glass-fibre reinforced polyester tube
Material (switching pin)	Steel, plastic-sheathed
Diameter	30 mm
Anti-rotation plug-in coupling including end fitting	No
Type of device	Switching stick
Weight	1,35 kg
Customs tariff number (Comb. Nomenclature EU)	82055980
GTIN	4013364003330
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.