


PHE3S60 110S CSN7774 (769 712)

■ Transport case included

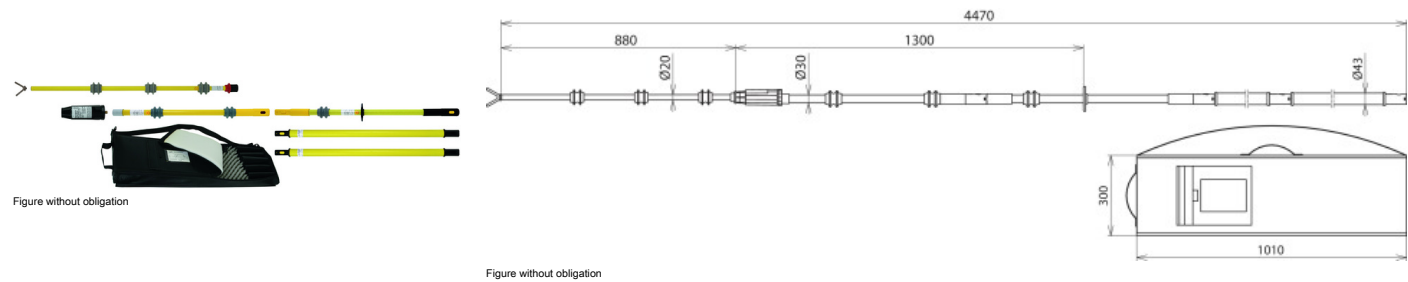

| Type                                                    | PHE3S60 110S CSN7774                        |
|---------------------------------------------------------|---------------------------------------------|
| Part No.                                                | 769 712                                     |
| Nominal voltage (U <sub>N</sub> )                       | 60 ... 110 kV                               |
| Type of voltage                                         | a.c.                                        |
| Frequency                                               | 50 Hz                                       |
| Category                                                | S                                           |
| Total length (l <sub>G max</sub> / l <sub>G min</sub> ) | 4470 / 2840 mm                              |
| Insertion depth (l <sub>o</sub> )                       | 880 mm                                      |
| Standard                                                | EN/IEC 61243-1 (DIN VDE 0682-411)           |
| Temperature range                                       | -25 °C ... +55 °C, climatic category N      |
| Design                                                  | complete                                    |
| For use at                                              |                                             |
| For                                                     | indoor and outdoor installations            |
| Application                                             | switchgear installations and overhead lines |
| Design                                                  | single-pole                                 |
| Indication                                              | acoustic and visual                         |
| Self-testing element                                    | yes                                         |
| Material (test electrode)                               | copper alloy/gal Sn                         |
| Material (test prod)                                    | glass-fibre reinforced epoxy resin tube     |
| Material (indicator)                                    | plastic, fully insulated                    |
| Material (insulating stick)                             | glass-fibre reinforced polyester tube       |
| Weight                                                  | 5,23 kg                                     |
| Customs tariff number (Comb. Nomenclature EU)           | 90303370                                    |
| GTIN                                                    | 4013364242517                               |
| PU                                                      | 1 pc(s)                                     |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.