


## PHE3S 110 132 S (767 131)

- Easy transport due to detachable test prod and modular insulating stick

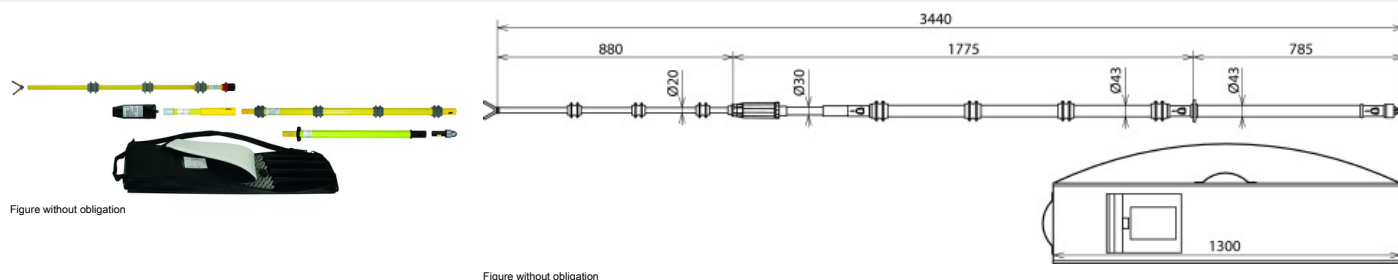

For 50 Hz three-phase systems and 16.7 Hz centre-earthed monophas traction power lines  
Range does not have to be switched

| Type                                          | PHE3S 110 132 S                             |
|-----------------------------------------------|---------------------------------------------|
| Part No.                                      | 767 131                                     |
| Nominal voltage (U <sub>N</sub> )             | 110 ... 132 kV                              |
| Type of voltage                               | a.c.                                        |
| Frequency                                     | 50 and 16.7 Hz                              |
| Category                                      | S                                           |
| Total length (l <sub>σ</sub> )                | 3440 mm                                     |
| Insertion depth (l <sub>o</sub> )             | 880 mm                                      |
| Standard                                      | EN/IEC 61243-1 (DIN VDE 0682-411)           |
| Temperature range                             | -25 °C ... +55 °C, climatic category N      |
| Design                                        | Complete                                    |
| For use at                                    | ▲                                           |
| For                                           | For indoor and outdoor installations        |
| Application                                   | Switchgear installations and overhead lines |
| Design                                        | Single-pole                                 |
| Indication                                    | Acoustic and visual                         |
| Self-testing element                          | Yes                                         |
| Material (test electrode)                     | Copper alloy/gal Sn                         |
| Material (test prod)                          | Glass-fibre reinforced epoxy resin tube     |
| Material (indicator)                          | Plastic, fully insulated                    |
| Material (insulating stick)                   | Glass-fibre reinforced polyester tube       |
| DB drawing No.                                | 3 Eku 710 001                               |
| DB material No.                               | 01 101 358                                  |
| Weight                                        | 6,2 kg                                      |
| Customs tariff number (Comb. Nomenclature EU) | 90303370                                    |
| GTIN                                          | 4013364139411                               |
| PU                                            | 1 pc(s)                                     |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.