

## EKV5+0 120 G VVL7AKP (VVL7AKP)

- Anti-rotation crimped cable lugs (type PK1)
- Earthing and short-circuiting devices can be configured online via the earthing and short-circuiting configurator

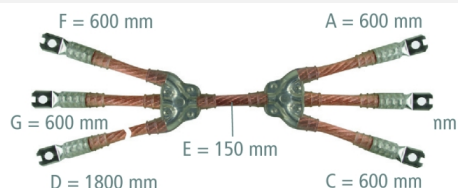


Figure without obligation

Type	EKV5+0 120 G VVL7AKP
Part No.	VVL7AKP
Version	Five-pole
Cable cross-section (phase side)	120 mm <sup>2</sup>
Cable cross-section (earth side)	120 mm <sup>2</sup>
Length of phase cable A	600 mm
Length of phase cable B	600 mm
Length of phase cable C	600 mm
Length of phase cable F	600 mm
Length of phase cable G	600 mm
Length of earthing cable	1800 mm
Cable cross-section	120 mm <sup>2</sup>
Fully insulated	No
Max. short-circuit current I <sub>k</sub> 0.5 s	33.5 kA
Max. short-circuit current I <sub>k</sub> 1 s	23.7 kA
Crimped cable lug	PK1
Standard	EN/IEC 61138 (DIN VDE 0283-3) and EN/IEC 61230 (DIN VDE 0683-100)
Temperature range	-25 °C ... +55 °C
Material (cable)	E-Cu, extra finely stranded and highly flexible
Material (sheath)	Thermoplastic polymer (flexible PVC compound YM2)
Hole (cable lug)	Ø12.5 mm
Weight	10 kg
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364164130
PU	1 pc(s)

**Attention: Please state the relevant Variant No. when ordering.**

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.