

EKV1+1 50 VQY44GL (VQY44GL)

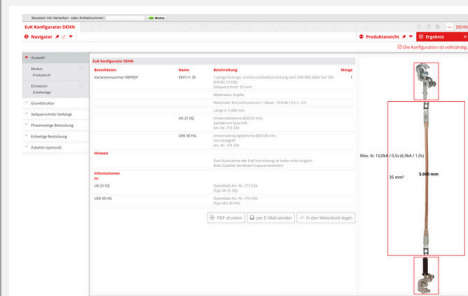


Figure without obligation

| Type | EKV1+1 50 VQY44GL |
|---|---|
| Part No. | VQY44GL |
| Phase cable end | UK 25 SQ |
| Earth cable end | UEK 30 HG |
| For fixed ball point Ø | 20 / 25 mm |
| For T pins with a collar width of | 15 mm |
| Rd / FI clamping range | 20 mm |
| Cable cross-section Cu | 50 mm ² |
| Max. short-circuit current I _k 0.5 s | 14.0 kA |
| Max. short-circuit current I _k 1 s | 9.9 kA |
| Standard | EN/IEC 61138 (DIN VDE 0283-3) and EN/IEC 61230 (DIN VDE 0683-100) |
| Temperature range | -25 °C ... +55 °C |
| Material (cable) | E-Cu, extra finely stranded and highly flexible |
| Material (sheath) | Thermoplastic (soft PVC compound YM2) |
| Weight | 4,51 kg |
| Customs tariff number (Comb. Nomenclature EU) | 85359000 |
| GTIN | 4013364165656 |
| PU | 1 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.