

ATK 120 ..M NS (785 468)

- Protection against accidental and direct contact with live parts
- For covering adjacent live parts
- Available in different lengths, widths, thicknesses and colours

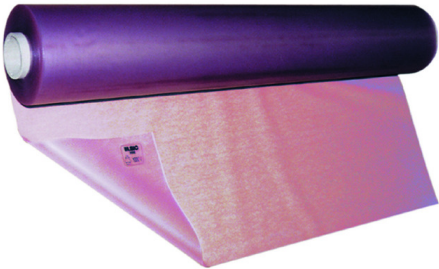


Figure without obligation

Type Part No.	ATK 120 ..M NS 785 468
Class	0
Nominal voltage up to (U _N)	1000 V
Material	PVC
Length	Any up to 25 m ^{*)}
Width	1200 mm
Thickness	1.0 mm
Colour	Transparent
Minimum order length	500 mm
Standard	DIN VDE 0682-511 (EN/IEC 61112)
Weight	1,64 g/mm
Customs tariff number (Comb. Nomenclature EU)	39204390
GTIN	4013364088757
PU	500 mm

^{*)} Length to be specified when ordering!
Note: Can only be supplied in 500 mm increments.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.