

## KSX SQ A MS VSJ3Y6N (VSJ3Y6N)

- Short-circuiting bars can be configured online via the earthing and short-circuiting configurator

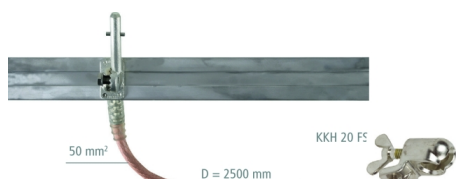


Figure without obligation




Figure without obligation

Type	KSX SQ A MS VSJ3Y6N
Part No.	VSJ3Y6N
Application	MV
Coupling mechanism	SQ
Position of the coupling mechanism ( $l_H$ )	675 mm
Profile	60 x 12 mm
Height	60 mm
Width	12 mm
Total length ( $l_G$ )	1500 mm
Bar spacing ( $S_A$ )	450 mm
Max. short-circuit current $I_k$ 0.5 s	60 kA
Max. short-circuit current $I_k$ 1 s	60 kA
For	Medium-voltage installations
Standard	EN/IEC 61230 (DIN VDE 0683-100)
Temperature range	-25 °C ... +55 °C
Material (Short-Circuiting Bar)	Aluminium
Material (cable)	Highly flexible copper
Cable cross-section	50 mm <sup>2</sup>
Cable length	2500 mm
Weight	10 kg
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364461994
PU	1 pc(s)

**Important:** Please state the unique Variant No. when ordering.

**Note:** Other types can be configured online via the earthing and short-circuiting configurator

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Two coupling mechanisms are required for a total length > 1000 mm.

**Note:** When ordering, please specify the Variant No. generated online via the earthing and short-circuiting configurator.