


DLH UG 8 H20 L335 V2A (206 219)



Figure without obligation

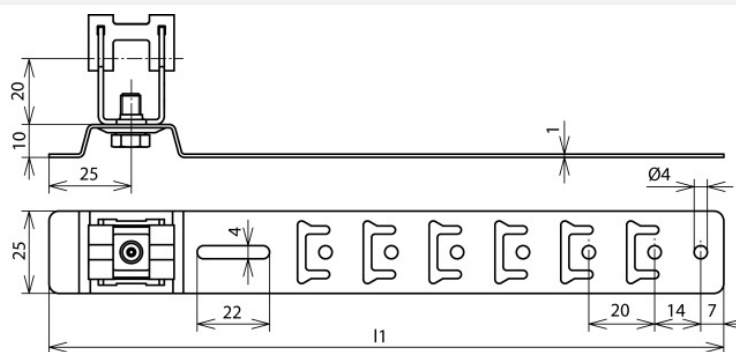

| Type | DLH UG 8 H20 L335 V2A |
|---|--------------------------------|
| Part No. | 206 219 |
| Material of roof conductor holder | StSt |
| Length of brace (l1) | 335 mm |
| Height of conductor holder | 20 mm |
| Material of conductor holder | StSt |
| Conductor support Rd | 8 mm |
| Type of conductor holder | DEHNgrip |
| Conductor routing | loose |
| Brace type | preformed bending points |
| Fixing possibilities | hook locking, angling, nailing |
| Type of roofing | pantiled roofs |
| Female thread | M6 |
| Standard | EN 62561-4 |
| Weight | 83 g |
| Customs tariff number (Comb. Nomenclature EU) | 85389099 |
| GTIN | 4013364042766 |
| PU | 50 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.