

HSA205 U 1 420SN7608 (767 547)



Figure without obligation

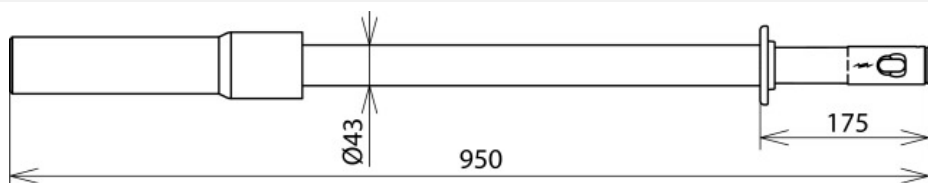


Figure without obligation

| Type | HSA205 U 1 420SN7608 |
|---|--|
| Part No. | 767 547 |
| Nominal voltage range (U _N) | 1 ... 30 / 30 ... 220 / 110 ... 420 kV |
| Frequency | 60 Hz |
| Total length (l _G) | 950 mm |
| Insulating clearance (l _i) | 540 mm |
| Temperature range | -25 °C ... +55 °C, climatic category N |
| For use at | ☀ |
| Indication | Visual and acoustic |
| Self-testing element | Yes |
| Material (insulating stick) | Glass-fibre reinforced polyester tube |
| Weight | 2 kg |
| Customs tariff number (Comb. Nomenclature EU) | 90303370 |
| GTIN | 4013364158276 |
| PU | 1 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.