



PV 5.16 SKM10X50 CU (306 101)



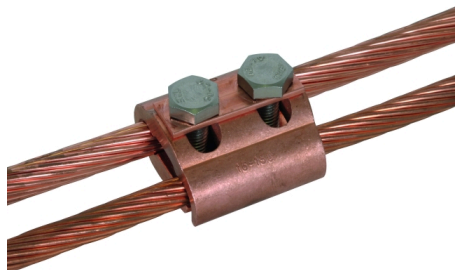


Figure without obligation



With thread in the base part and lock nut M10
 Specified short-circuit current applies to 70 mm² Cu cable



| Type | PV 5.16 SKM10X50 CU |
|---|--------------------------|
| Part No. | 306 101 |
| Material of clamp | Cu |
| Clamping range Rd / Rd | 5-16 mm |
| Clamping range (stranded / cable) | 16-150 mm ² |
| Screw | M10 x 50 mm |
| Material of screw / nut | StSt (V4A) |
| Material No. | 1.4571 / 1.4404 / 1.4401 |
| ASTM / AISI: | 316Ti / 316L / 316 |
| Lightning current carrying capability (10/350 µs) | ^{*)} |
| Standard | EN 62561-1 |
| Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C) | 13.6 kA |
| Weight | 412 g |
| Customs tariff number (Comb. Nomenclature EU) | 85359000 |
| GTIN | 4013364024120 |
| PU | 25 pc(s) |

^{*)}For exact classification, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.