

BEV OL PF V2 K (750 214)

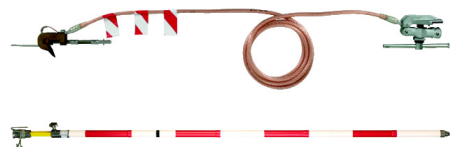


Figure without obligation

| Kit includes: | | |
|------------------------------|------------|--------------|
| Type | Part No. | Pos. No. |
| Tommy bar (K) or ratchet (R) | | |
| EKV K 50 12000 | 1x 751 126 | 1+4+8 |
| ESTC SQL H RW 5000 | 1x 769 508 | 13 |

Figure without obligation

| Type | BEV OL PF V2 K |
|--|---------------------------------|
| Part No. | 750 214 |
| Design | Tommy bar |
| Type of cable | Single-pole |
| Cable cross-section (phase side) | 50 mm ² |
| Cable cross-section (earth side) | 50 mm ² |
| Length (single-pole cable) | 12000 mm |
| Fully insulated | No |
| Cable length | 12000 mm |
| Standard | EN/IEC 61230 (DIN VDE 0683-100) |
| Max. short-circuit current I _k 0.06 s | 32.0 kA |
| DB drawing No. | 3 Ebgw 01.51 |
| DB material No. | 237 115 |
| Weight | 15,6 kg |
| Customs tariff number (Comb. Nomenclature EU) | 85359000 |
| GTIN | 4013364123816 |
| PU | 1 pc(s) |

¹⁾ Profile-free earthing means that the earthing cable can be suspended on the tower thus allowing for limited diesel locomotive operation.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.