


DIDH 16 690 RS40.60 V2A (106 226)

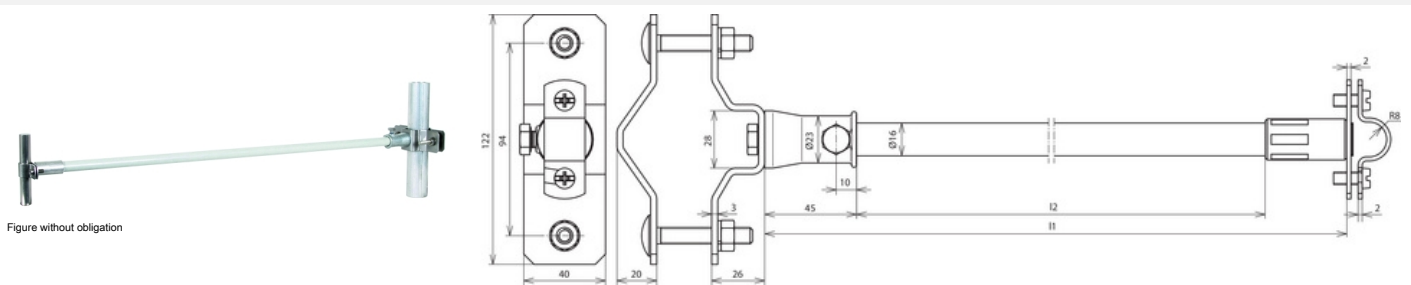

| Type | DIDH 16 690 RS40.60 V2A |
|---|---------------------------------------|
| Part No. | 106 226 |
| Conductor support Rd | 16 mm |
| Material of conductor holder | StSt |
| Length (l1) | 690 mm |
| Insulating clearance (l2) | 605 mm |
| Clamping range of pipe | 40-60 mm (1 1/4"-2") |
| Diameter Ø of spacer | 16 mm |
| Colour of spacer | light grey (RAL 7035) • |
| Conductor routing | fixed |
| Rod / conductor holder | two-screw clamp |
| Material of spacer | GRP |
| Material factor km | 0.7 |
| Permanent temperature range | -50 °C ... +100 °C |
| Material of fixing bush | ZDC |
| Material of fixing element | StSt |
| Type | UV-stabilised and weather-resistant |
| Standard | DIN IEC/TS 62561-8 (VDE V 0185-561-8) |
| Weight | 722 g |
| Customs tariff number (Comb. Nomenclature EU) | 85389099 |
| GTIN | 4013364098930 |
| PU | 1 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Verisons with other spacer bar lengths are available upon request.