

## TRS MS V1 (785 112)

- Transparent intake tubes ensure enhanced safety
- Plug-in coupling system allows fast replacement of operating heads
- Delivered in a suitable transport case



Figure without obligation

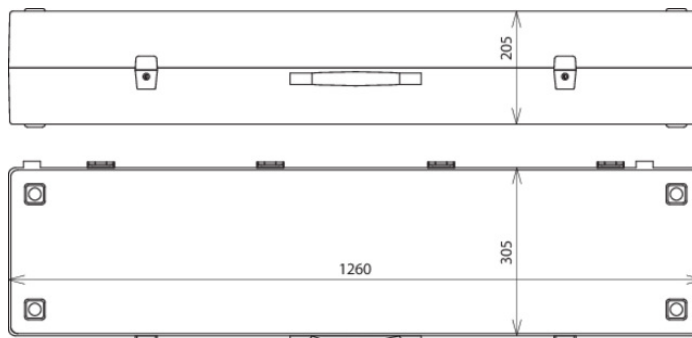


Figure without obligation

Type	TRS MS V1
Part No.	785 112
Nominal voltage (U <sub>N</sub> )	Up to 36 kV
Frequency range	15 ... 60 Hz
Dimensions	1260 x 305 x 205 mm
Total length (l <sub>G max</sub> / l <sub>G min</sub> )	3580 / 1180 mm
Extension (l <sub>G max</sub> / l <sub>G min</sub> )	2515 / 115 mm
Standard	DIN VDE 0682-621
For use at	*
Weight	17,8 kg
Customs tariff number (Comb. Nomenclature EU)	82055980
GTIN	4013364106550
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.