

## FM D40 L2700 GFK AL V2A DBS R320 STTZN (819 690)

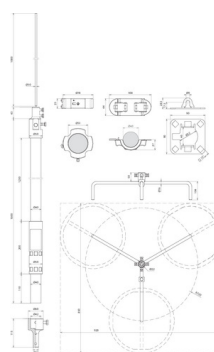


Figure without obligation

| Type  | FM D40 L2700 GFK AL V2A DBS R320 STTZN           |
|---|--|
| Part No.                                      | 819 690  |
| Height  | 2700 mm  |
| Material of tripod                            | HDG steel (St/tZn)                               |
| Space required for tripod                     | 850 x 920 mm                                     |
| Radius of tripod                              | 320 mm   |
| Number of bases                               | 3  |
| Material of supporting tube                   | GRP / Al   |
| Length of supporting tube                     | 1600 mm  |
| Insulating clearance                          | 1230 mm  |
| Diameter Ø outside                            | 40 mm  |
| Length of air-termination tip                 | 1000 mm  |
| Material of air-termination tip               | StSt   |
| Pull-out force with a length of 500#mm        | 200 N (supporting tube insulator as per 62561-8) |
| Bending force with a length of 500#mm         | 200 N (supporting tube insulator as per 62561-8) |
| Standard                                      | DIN IEC/TS 62561-8 (VDE V 0185-561-8)            |
| Weight  | 6,4 kg   |
| Customs tariff number (Comb. Nomenclature EU) | 85389099   |
| GTIN  | 4013364494466                                    |
| PU  | 1 pc(s)  |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Specifications regarding max. gust wind speeds of the air-termination systems can be found in the wind load matrix.