



## KS 8.10 FL40 CU (321 047)





Figure without obligation

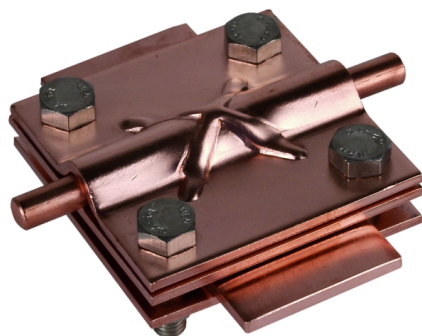

Arrangement:

Type	KS 8.10 FL40 CU
Part No.	321 047
Material of clamp	Cu
Clamping range Rd / FI	8-10 / 30-40 mm
Clamping range FI / FI	30-40 / 30-40 mm
Clamping range (stranded / cable)	35-120 mm <sup>2</sup>
Screw	⚙️ M8 x 30 mm
Material of screw / nut	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI:	316Ti / 316L / 316
Dimensions	70 x 70 x 3 mm
Intermediate plate	yes
Lightning current carrying capability (10/350 μs)	<sup>*)</sup>
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	35.1 kA
Weight	453 g
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364021525
PU	25 pc(s)

<sup>\*)</sup> See test certificate for exact classification.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.