

## FEIN VersaMAG core drilling Set MK3

Magnetic vice including core drilling set



The FEIN VersaMAG core drilling set is the perfect combination of the fastest core drilling result and tool-free flexible clamping with the FEIN VersaMAG vice. Perfectly suited to working on table / box column drills.

Part number: 9 07 01 007 00 0

### FEIN benefits

- > Core drilling set: Produce large holes at speed and with ease. Cut working times by up to 40 % compared with conventional twist drilling. In combination with the FEIN VersaMAG vice, materials can be clamped on table / box column drills flexibly, intuitively and without the need for tools.
- > Mobile, flexible and swift use. Adapts to every workstation thanks to the compact design and extra-narrow permanent magnet.
- > Optimises every workstation: clean and reliable working with versatile application options.
- > Modular system: the unique modular system ensures a secure hold in a very wide range of work situations and the right accessories can be added at any time.
- > 30% magnetic bias for precise alignment of the permanent magnet.
- > The vice has a clamping range of 108 mm and a jaw width of 100 mm.
- > L-BOXX system: Keep things stowed clearly, tidily and safely. Thanks to the tray for small parts, there is room for all accessories and the L-BOXXs can also be joined together and stacked with ease.

### Supplied




- ✓ 1 x permanent magnet
- ✓ 1 x 3 mm socket head wrench
- ✓ 2 x 100 mm centring pins
- ✓ 1 plastic tool case (L-BOXX 238)
- ✓ 1 x mounting plate
- ✓ 1 lashing strap
- ✓ 1 x coolant pump
- ✓ 1 x vice
- ✓ 1 best of core drilling set (6x core drills, HSS diameters of 12, 14, 16, 18, 20, 22 mm), cutting depth 50 mm
- ✓ 1 x 3/4 in Weldon mounting shaft MK3 (Ø 12 - 65 mm)

## Technical data

### GENERAL TECHNICAL DATA

|                          |             |
|--------------------------|-------------|
| Chuck opening            | 108 mm      |
| Jaw height               | 40 mm       |
| Jaw width                | 100 mm      |
| Magnetic holding power   | 7,800 N     |
| Magnetic foot dimensions | 212 x 70 mm |
| Weight according to EPTA | 12.85 kg    |

## Examples of use

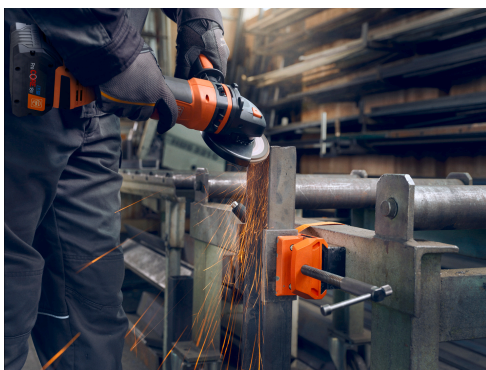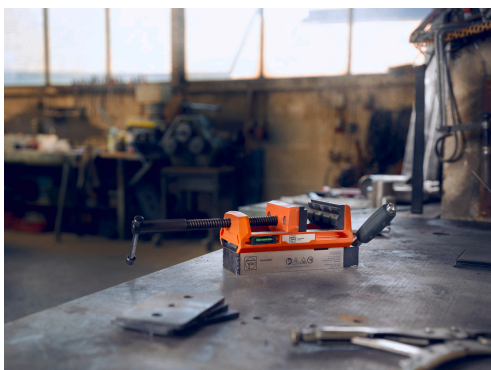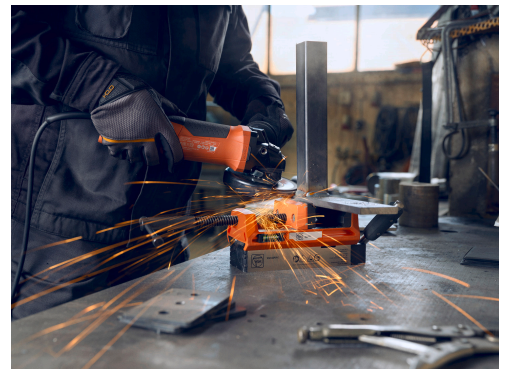



**VERSAMAGI**  
SYSTEM

