

### MVK AR 8.10 SKM10X40 V4A (391 079)


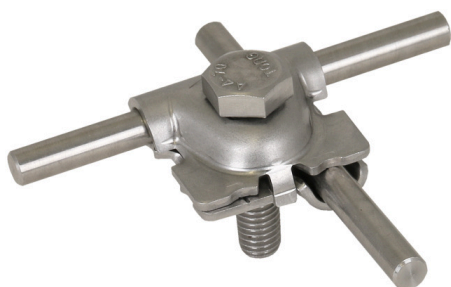


Figure without obligation



The locking lug is used to lock the MV clamp securely in a cross arrangement.



Type	MVK AR 8.10 SKM10X40 V4A
Part No.	391 079
Material of clamp	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI:	316Ti / 316L / 316
Clamping range Rd	8-10 mm
Clamping range (stranded / cable)	35-70 mm <sup>2</sup>
Material thickness (t1 / t2)	2.5 / 2.5 mm
Screw	M10 x 40 mm
Material of screw / nut	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI:	316Ti / 316L / 316
Lightning current carrying capability (10/350 µs)	/ <sup>*)</sup>
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	9.8 <sup>*)</sup> kA
Weight	93 g
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364487130
PU	50 pc(s)

<sup>\*)</sup> For exact assignment, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.